



US005504708A

United States Patent [19]

[11] Patent Number: **5,504,708**

Santin et al.

[45] Date of Patent: **Apr. 2, 1996**

[54] **FLASH EEPROM ARRAY WITH P-TANK INSULATED FROM SUBSTRATE BY DEEP N-TANK** 5,309,402 5/1994 Okazawa 365/900

[75] Inventors: **Giovanni Santin; Giovanni Naso**, both of Rieti, Italy; **Sebastiano D'Arrigo**, Cannes, France; **Michael C. Smayling**, Missouri City, Tex.

Primary Examiner—David C. Nelms
Assistant Examiner—F. Nirranjan
Attorney, Agent, or Firm—Theodore D. Lindgren; Leo N. Heiting; Richard L. Donaldson

[73] Assignee: **Texas Instruments Incorporated**, Dallas, Tex.

[57] **ABSTRACT**

[21] Appl. No.: **369,025**

[22] Filed: **Jan. 5, 1995**

In accordance with one embodiment of the invention, a nonvolatile memory array is encased in a P-tank, and the P-tank encased in a deep N-tank, the two tanks separating the memory array from the substrate and from the other circuitry of the integrated memory circuit. The deep N-tank allows application of a negative voltage of perhaps -8 V to the P-tank encasing the memory array. Application of that negative voltage permits the cells of the memory array to be programmed with voltage pulses having a peak value of about +10 V, rather than the +18 V peak value of prior-art memory arrays. Because the external circuitry, such as the wordline driver circuit, need drive the wordlines at +10 V rather than +18 V, the invention permits construction of that external circuitry using thinner gate insulators and space-saving shorter dimensions.

Related U.S. Application Data

[62] Division of Ser. No. 890,577, May 28, 1992.

[51] Int. Cl.⁶ **G11C 11/34**

[52] U.S. Cl. **365/185.27; 365/185.28; 365/185.18; 257/390; 257/500; 257/505**



[58] **Field of Search** 365/185, 900; 257/390, 499, 500, 501, 505, 506, 508; 437/43, 48, 52

[56] **References Cited**

U.S. PATENT DOCUMENTS

5,262,985 11/1993 Wada 365/900

12 Claims, 5 Drawing Sheets

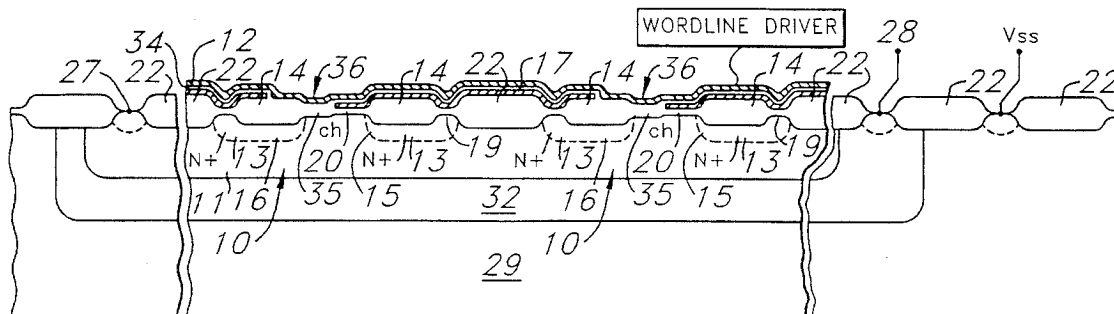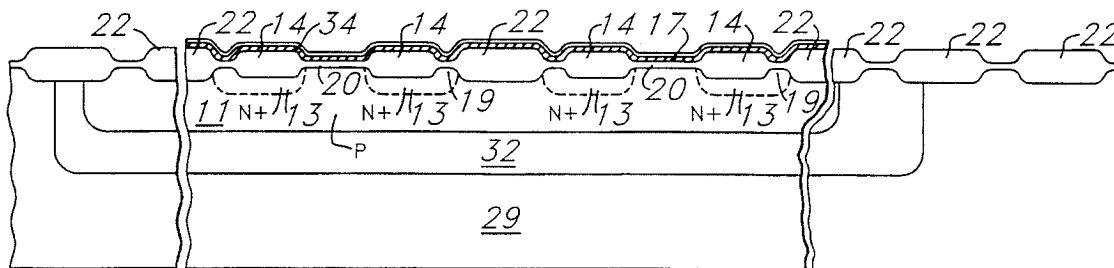

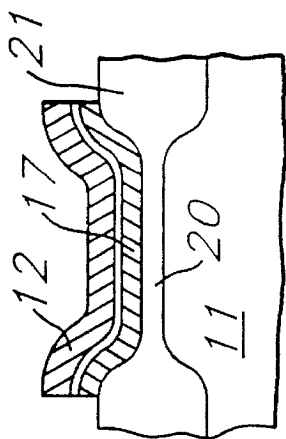
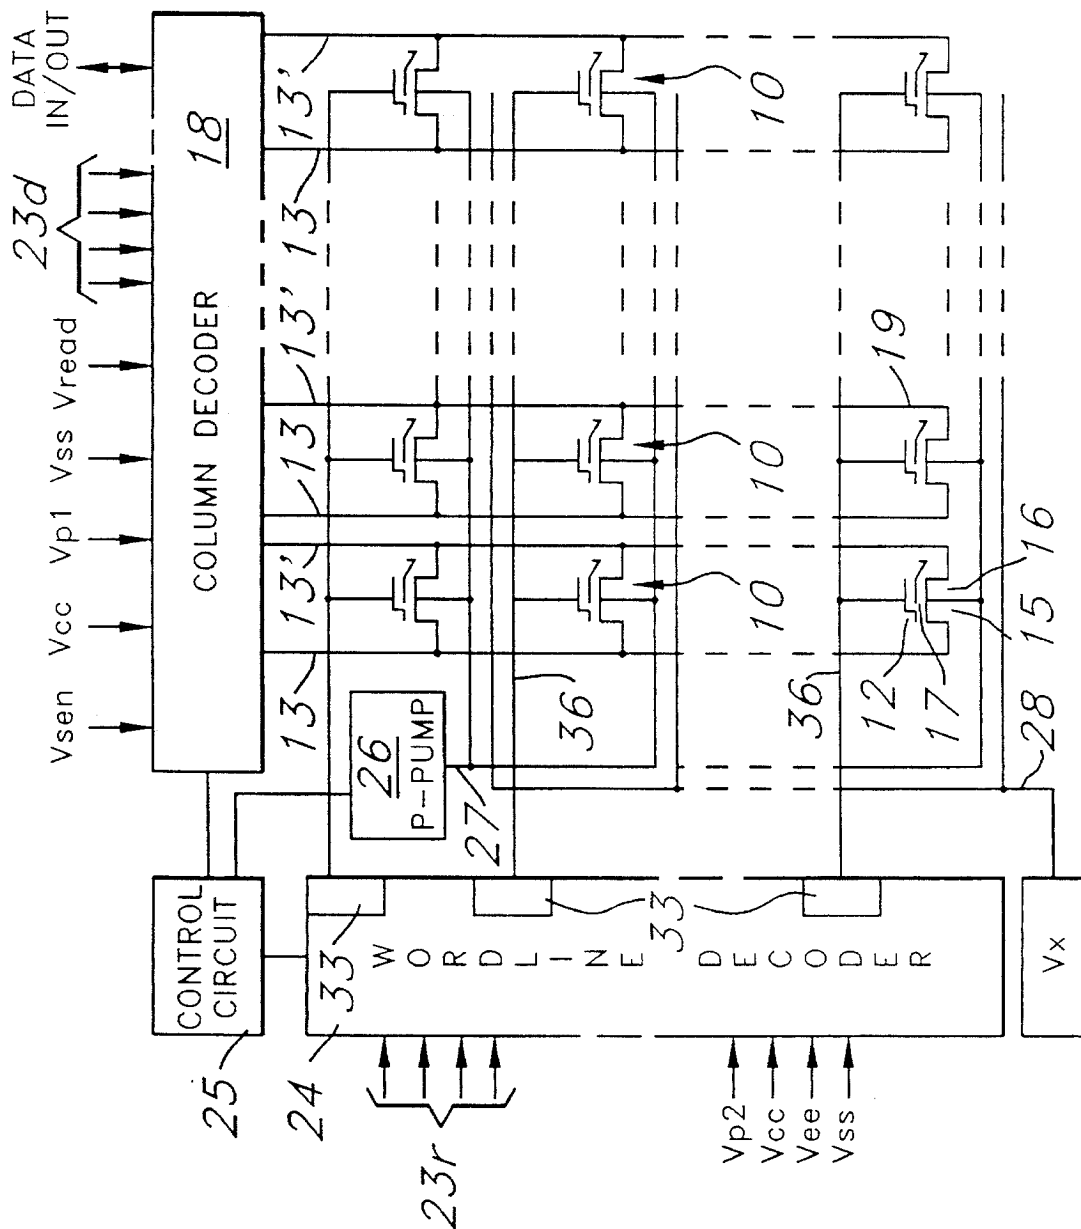


Fig. 4

Fig. 1

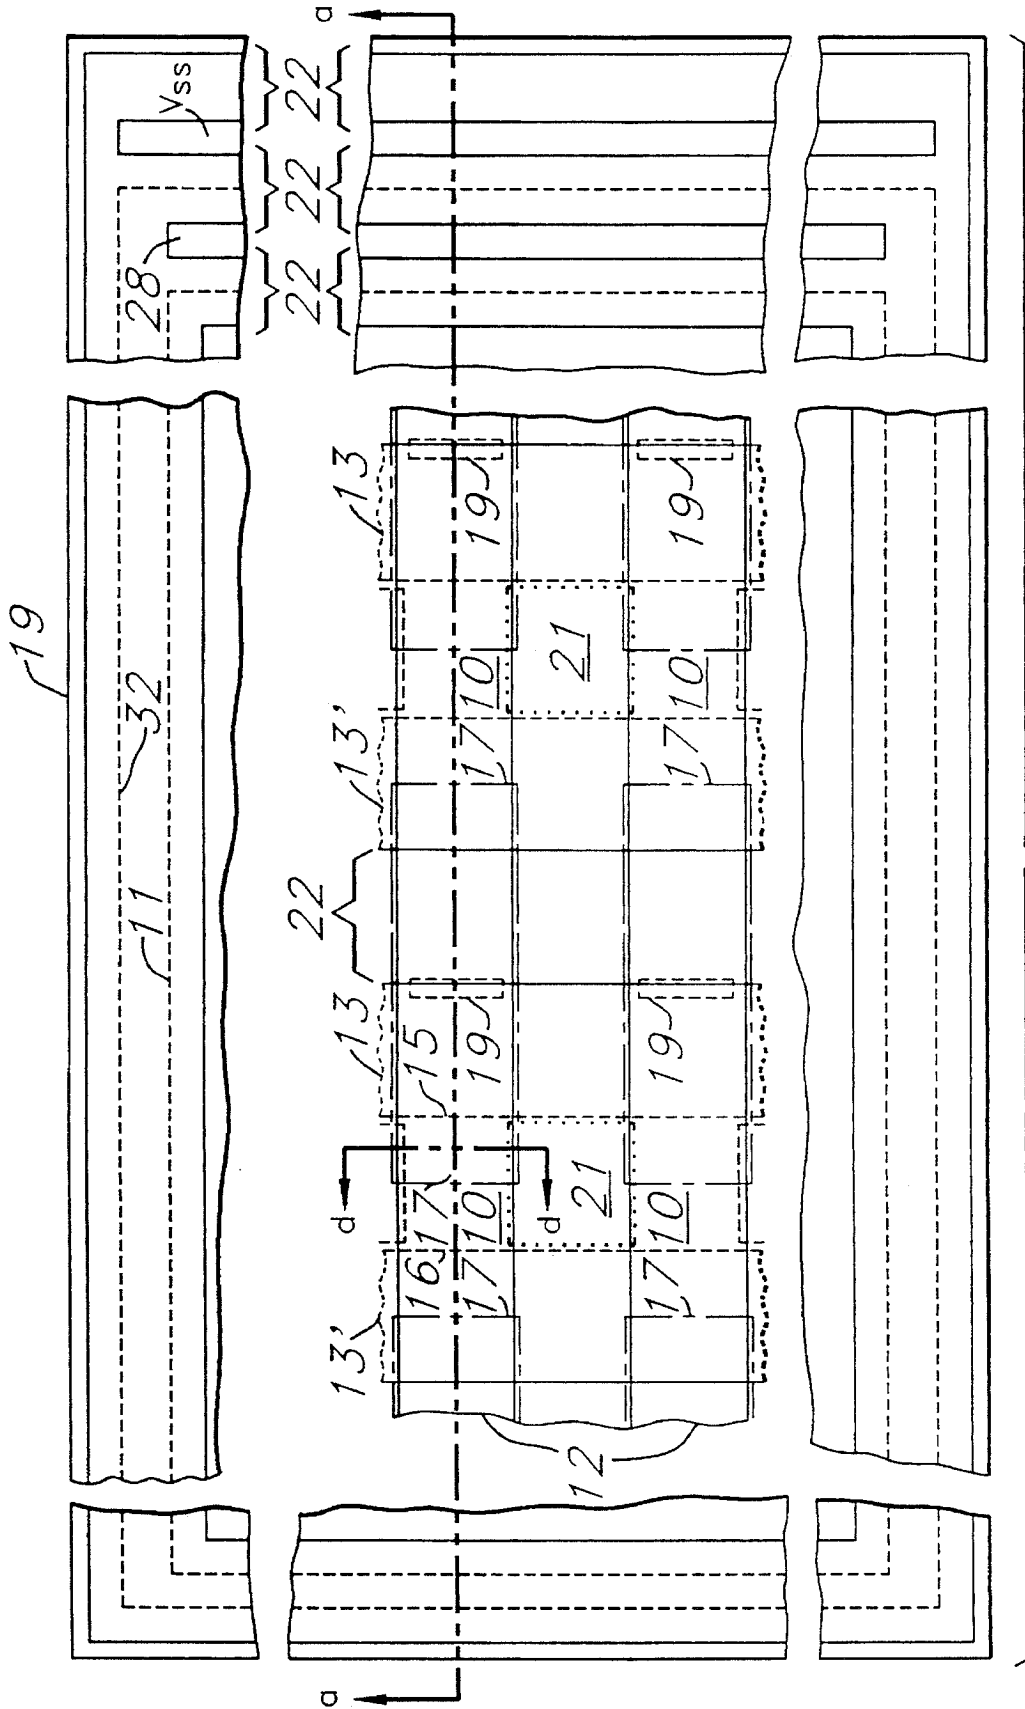


Fig. 2

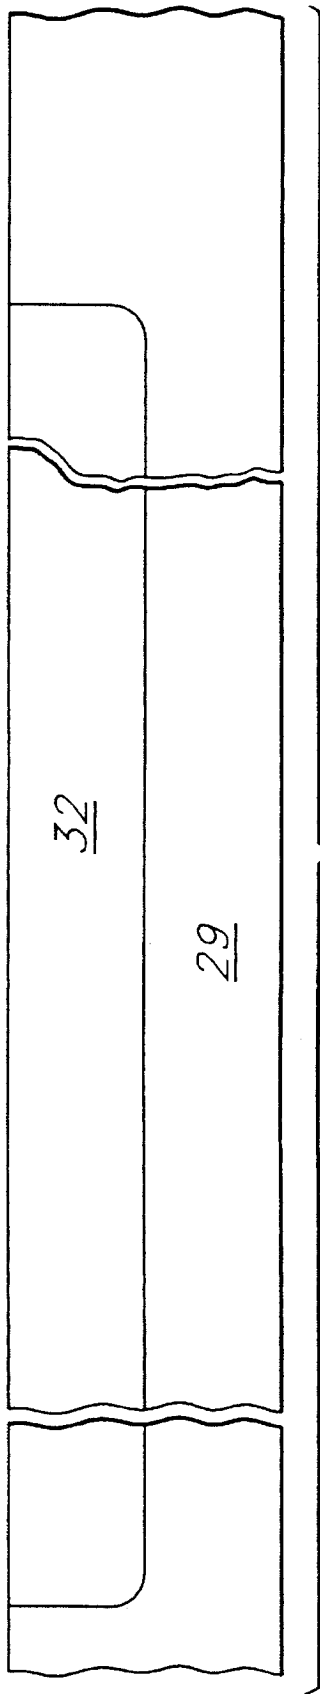


Fig. 3A

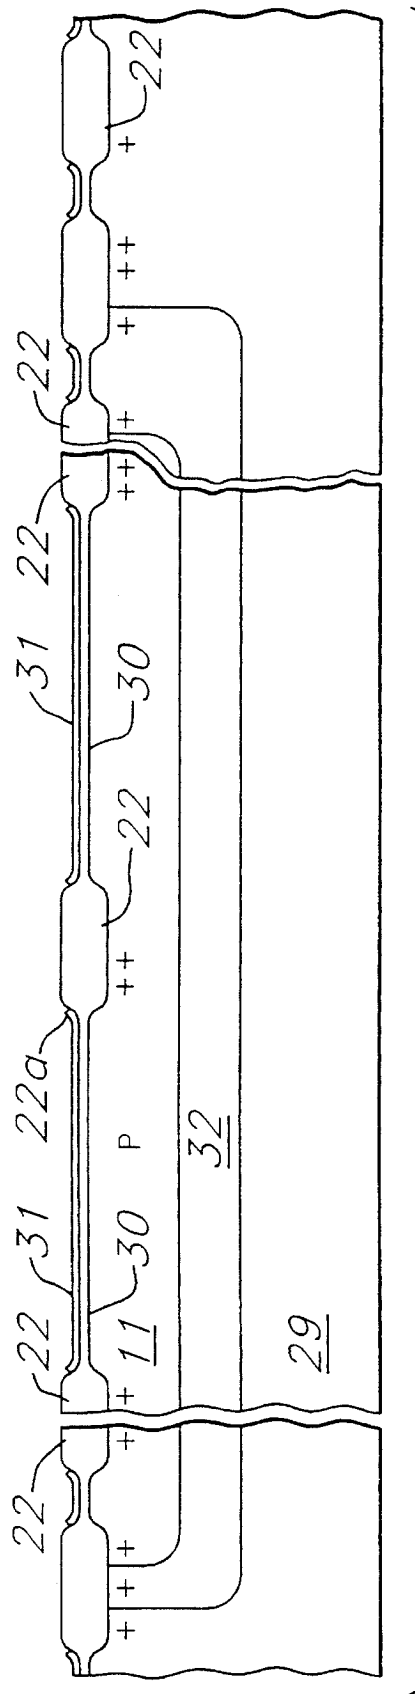


Fig. 3B

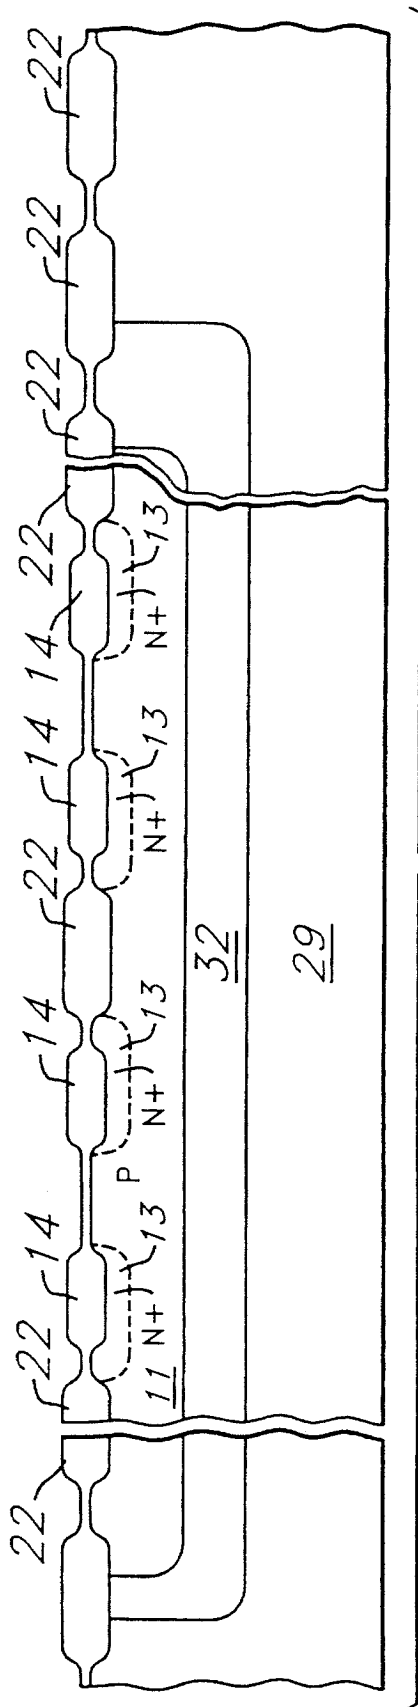


Fig. 3C

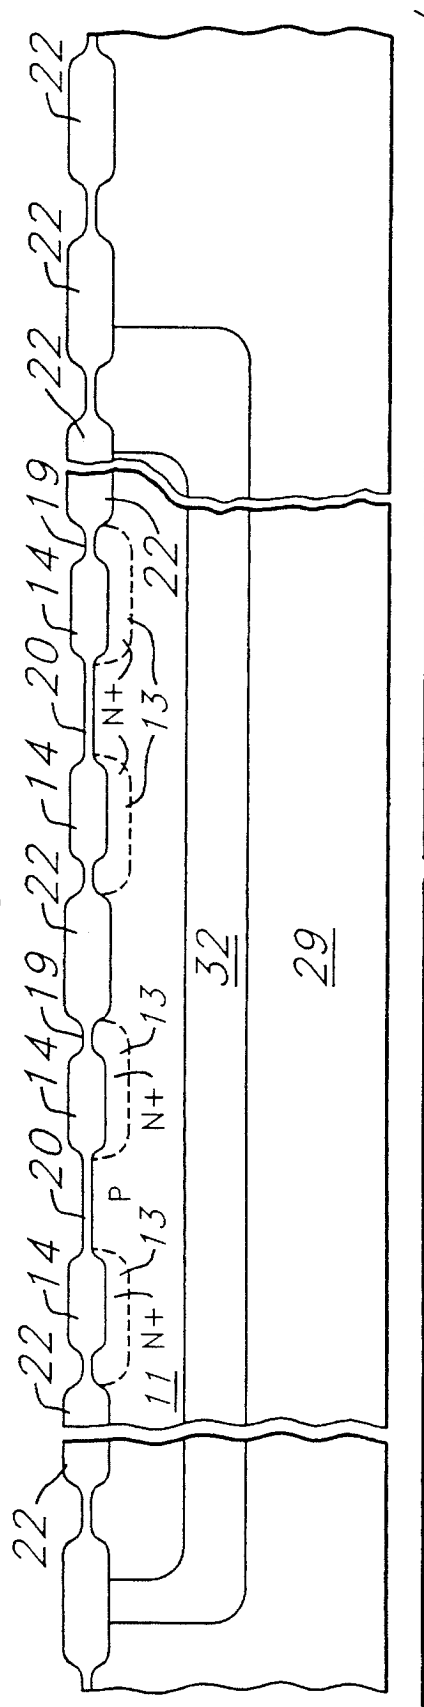


Fig. 3D

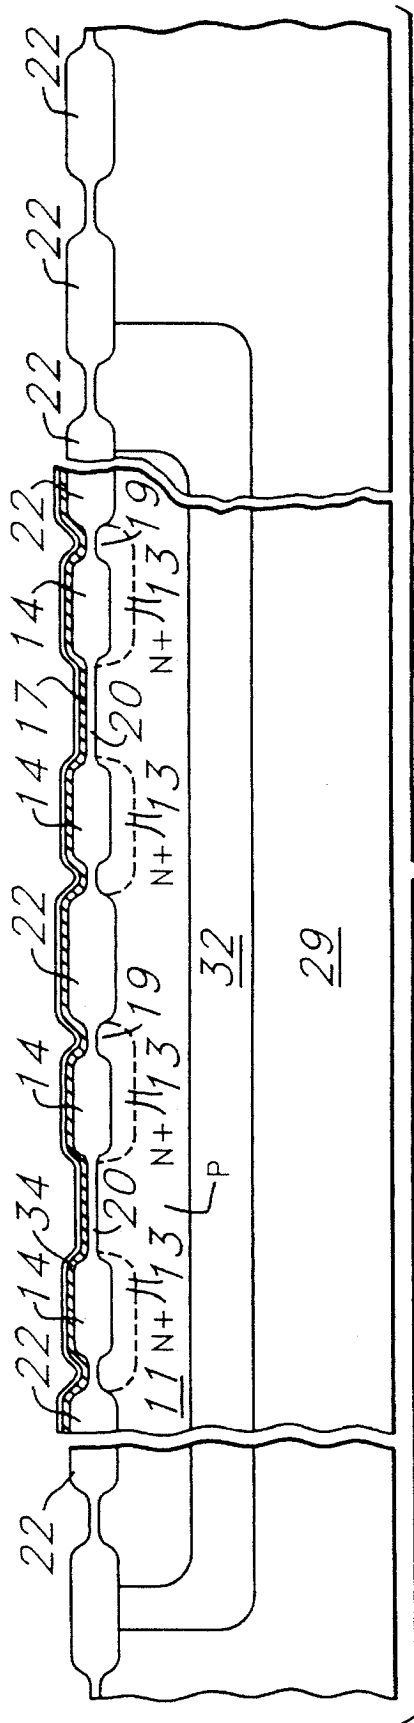


Fig. 3E

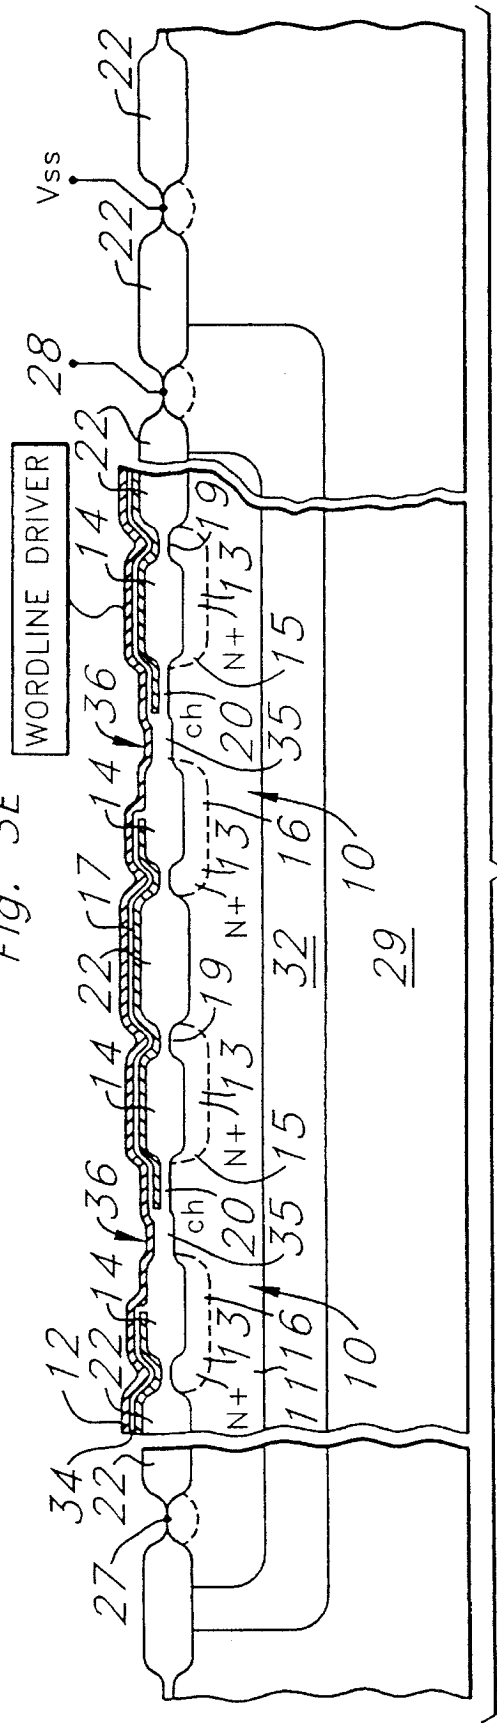


Fig. 3F

1

FLASH EEPROM ARRAY WITH P-TANK INSULATED FROM SUBSTRATE BY DEEP N-TANK

This is a division of application Ser. No. 07/890,577 filed 5
May 28, 1992.

NOTICE

Copyright© 1992 Texas Instruments Incorporated. A portion of this patent document contains material that is subject to copyright protection. Texas Instruments Incorporated has no objection to the facsimile reproduction of the issued patent or of those documents in the Patent and Trademark Office file pertaining to the issued patent. All other copyright rights are reserved. 10 15

BACKGROUND OF THE INVENTION

This invention relates to nonvolatile semiconductor memory devices and, more particularly, to electrically-erasable, electrically-programmable, read-only memories (EEPROMs) having floating-gate-type memory cells and to a method for making such devices. 20

Currently available nonvolatile memories require a programming voltage of about +18 V to write data into the floating gates of memory cells. In particular, a voltage pulse having a peak value of about +18 V is applied to the control gate of a cell during programming while the source of the cell is at 0 V. Application of the +18 V to the control gate causes unnecessarily high electric field stresses in circuits external to the memory array, such as the wordline driver circuitry. 25 30

There is a need for a nonvolatile memory array that permits the circuitry outside of the memory array to be constructed for use at lower voltages and decreased electric field stress. Such an array would allow external circuitry, such as wordline driver circuits, to be built with thinner gate oxides and with smaller dimensions, if operated at lower voltages. The smaller dimensions would allow a decrease in the size of the external circuitry to correspond to the continuing decrease in the size of memory cells. 35 40

SUMMARY OF THE INVENTION

In accordance with one embodiment of the invention, a nonvolatile memory array is encased in a P-tank, and the P-tank encased in a deep N-tank, the two tanks separating the memory array from the substrate and from the other circuitry of the integrated memory circuit. The deep N-tank allows application of a negative voltage of perhaps -8 V to the P-tank encasing the memory array. Application of that negative voltage permits the cells of the memory array to be programmed with voltage pulses having a peak value of perhaps +10 V, rather than the +18 V peak value of prior-art memory arrays. Because the external circuitry, such as the wordline driver circuit, need drive the wordlines at only +10 V rather than +18 V, the invention permits construction of that external circuitry using thinner gate insulators and space-saving shorter dimensions. 45 50 55

The term "tank" as used herein refers to a diffusion region formed in a semiconductor substrate. Such diffusion regions are sometimes referred to as a "tubs" or as a "wells". 60

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings:

FIG. 1 is a representation of an array of memory cells and associated circuitry according to this invention; 65

2

FIG. 2 is a plan view of a part of a semiconductor chip having memory cells according to one embodiment;

FIGS. 3A-3F are elevation views in section of the semiconductor device of FIG. 2, taken along the line a-a of FIG. 2 at various stages of construction; and

FIG. 4 is an elevation view in section of the semiconductor device of FIG. 2, taken along the line d-d of FIG. 2.

DETAILED DESCRIPTION OF SPECIFIC EMBODIMENT

Referring to FIG. 1, an example array of integrated-circuit memory cells is shown for the purpose of illustrating use of this invention. Each cell is a floating-gate transistor 10 having a control gate 12, a source 15, a drain 16 and a floating gate 17. A control gate 12 of each cell 10 in a row is connected to a wordline 36, and each of the wordlines 36 is connected to a wordline decoder 24, which includes wordline driver circuits 33. A source 15 of each cell 10 in a column is connected to a column line 13, and each of those column lines 13 is connected to a column decoder 18. A drain 16 of each cell 10 in a column is connected to a column line 13, and each of those column lines 13 is also connected to the column decoder 18. Address signals are transmitted to the wordline decoder 24 at terminals 23r and to the column decoder 18 at terminals 23d. The wordline decoder 24 and the column decoder 18 are controlled by a control circuit 25, which may be a part of a microprocessor physically located on another integrated circuit chip. P-tank charge pump 26 is controlled by control circuit 25 and is connected by terminal 27 to a region of the chip. As will be described later, terminal 27 is connected to a P-tank that is contained by a N-tank. As will also be described later, terminal 28 is connected to the N-tank. Terminal 28 is also connected to a voltage V_x, which may be the supply voltage V_{cc}, for example. 10 15 20 25 30 35 40

During a flash-erase mode, the column decoder 18 functions, for example, to apply a positive voltage V_{cc} (approximately +5 volts) to all of those column lines 13 that are connected to sources 15. The column decoder 18 also functions to leave floating all of those column lines 13 that are connected to drains 16. The wordline decoder 24 functions to cause the wordline driver circuits 33 to apply a high negative voltage V_{ee} (approximately -11 volts) to all of the wordlines 36. P-tank charge pump 26 applies 0 V to terminal 27. N-tank terminal 28 is connected to a voltage V_x of perhaps +5 V (which may be the supply voltage V_{cc}). The applied voltages erase programmed cells 10 by removing excess electrons from the floating gates 17. 45 50 55

In the read mode, the wordline decoder 24 functions, in response to wordline address signals on lines 23r and to a signal from read/write/erase control circuit 25, to cause a wordline driver circuit 33 to apply a preselected positive voltage V_{read} (perhaps +3.5 V) to the selected wordline 36 (and the selected control gate 12), and to cause the other wordline driver circuits 33 to apply a low voltage (V_{ss} or 0 V) to deselected wordlines 36. The column decoder 18 functions, in response to column address signals on lines 23d, to apply a preselected positive voltage V_{sen} (perhaps 1.5 V) to that column line 13 connected to the drain 16 of the selected cell 10. The column decoder 18 also functions to connect those column lines 13 connected to sources 15 to ground (V_{ss} or 0 V). The output of P-tank charge pump 26 is switched to apply a voltage of 0 V (V_{ss}) to terminal 27. N-tank terminal 28 is connected to a voltage source of perhaps +5 V (V_{cc}). The conductive or nonconductive state of the cell 10 connected by column line 13 to the drain 16 65

of the selected cell **10** and to wordline **36** of that selected cell **10** is detected by a sense amplifier (not shown) connected to the DATA OUT terminal.

In a basic write or program mode, P-tank charge pump **26** applies a voltage V_{b1} of -8 V to terminal **27**. A voltage V_x of perhaps $+5$ V (V_{cc}) is applied to terminal **28**. Column decoder **18**, in response to signals on lines **23d** and to a signal from control circuit **25**, functions to place voltage V_{p1} of about -8 V on the column line **13** connected to the source **15** of the selected cell **10**. The wordline decoder **24** functions, in response to wordline address signals on lines **23r** and to a signal from control circuit **25**, to cause wordline driver circuits **33** to place a voltage V_{p2} of about $+10$ V on the selected wordline **36** connected to the selected cell **10**, including the control gate **12** of the selected cell **10**. The difference between V_{p1} and V_{p2} must be of sufficient magnitude that excess electrons will migrate, perhaps by Fowler-Nordheim tunnelling, to the selected floating-gate **17** and, as a result, program the selected floating-gate **17**.

For convenience, a table of read, write and erase voltages is given in table I below:

TABLE 1

	Read	Write	Flash Erase
Selected Wordline	3.5 V	10 V	-10 V (All)
Deselected Wordlines	0 V	0 V	—
Selected Source Line	1.5 V	-8 V	5 V (All)
Deselected Source Line	Float	0 V	—
Selected Drain Line	0 V	Float	Float (All)
Deselected Drain Lines	0 V	Float	—
P-tank	0 V	-8 V	0 V
N-tank	5 V	5 V	5 V

Referring now to FIGS. 2 and 3F, an array of electrically-erasable, electrically-programmable memory cells **10** is shown formed in a face of a silicon substrate **29**. Only a very small part of the substrate **29** is shown in the FIGS., it being understood that cells **10** are part of an array of a very large number of such cells. A number of wordlines **36**/control gates **12** are formed by second-level polycrystalline silicon (polysilicon) strips **36** extending along the face of the substrate **29**, and column lines **13** are formed beneath thick thermal silicon oxide layers **14** in the face. These buried column lines **13** include the source **15** and the drain **16** for each of the cells **10**. A floating gate **17** for each cell **10** is formed by a first-level polysilicon layer extending across about half of a cell **10** and across one column line **13** and extending over onto another adjacent column line **13**. Two "horizontal" or X-direction, edges of the floating gate **17** are aligned with the edges of a wordline **36**.

A tunnel window **19** for programming and erasure is shown adjacent a column line **13** connected to each cell **10**, on the opposite side of the source **15** of each cell **10**. The silicon oxide at this tunnel window **19** is thinner, about 100 Å, compared to the dielectric coatings **35** and **20** of about 350 Å and 500 Å at the two parts of the channel Ch between source **15** and drain **16**. Programming and erasing can be performed at relatively low externally-applied voltages using this structure.

A thick field oxide area **22** is used to isolate cells **10** from one another in the Y-direction. Strips **22** of LOCOS thick field oxide separate column lines **13** between cells **10** in the X-direction. Note that the example array of cells **10** is not of the "virtual-ground-circuit" type; that is, there are two column lines **13** each column (Y-direction) of cells **10**.

A method of making the device of FIGS. 2, 3F and 4 will be described in reference to FIGS. 3A-3F. The starting

material is a slice of P-type silicon of which the substrate **29** is only a very small portion. The slice is perhaps 6 inches in diameter, while the portion shown in FIG. 2 is very small fraction of that slice. A number of process steps are performed to create transistors peripheral to the memory array, and those steps are not discussed here.

Referring now to FIG. 3A, a deep N-tank **32** is formed in the substrate **29** using the following process. An oxide layer and a nitride layer (not shown) are grown on the surface of substrate **29**. The nitride layer is then patterned and etched to define the area or areas in which the deep N-tank **32** implant is to occur. The length and the width the implant area must be sufficiently large that the corresponding dimensions of the memory array (or sub array) encase a P-tank which in turn encases the memory array. The N-tank implant is then conducted, preferably with phosphorous at a dose of about 2.5×10^{12} ions/cm² and at an energy level of about 80 KeV. An anneal of the N-tank dopant is performed at high temperature, perhaps 1200° C. for 700 minutes in a nitrogen atmosphere, to form a junction deeper than 2 microns. This creates deep (N-) tank region **32**.

Referring now to FIG. 3B, P-tank **11** is formed in the N-tank **32**. The P-tank **11** is patterned with a photoresist layer (not shown) and a P-type implant is performed, preferably with boron at a dose of about 2.5×10^{12} ions/cm² and an energy of approximately 40 KeV. The length and width of the pattern must be sufficiently small to allow the P-tank **11** to be encased by the deep N-tank **32**, but sufficiently large to encase the memory array (or sub-array). This implantation causes the creation of the channel Ch regions of the memory cells **10** and any other field effect transistors included in the memory array. The photoresist layer then stripped.

Additional patterned N- and P- implants of phosphorous and boron are performed for low-voltage transistor-tank regions. These implants are performed, for example, at 8×10^{12} ions/cm² at an energy of 80 KeV and at 1.5×10^{12} ions/cm² at an energy of 40 KeV, respectively. All tank dopants are driven in a second anneal at perhaps 1100° C. for 500 minutes in a nitrogen atmosphere.

Active regions are defined by a conventional LOCOS process. Oxide is grown, then nitride deposited to serve as a diffusion barrier. The nitride is patterned and etched where isolation oxide will be grown.

As also illustrated in FIG. 3B, a channel-stop implant is performed. To protect areas of the substrate **29** and P-tank **11** surface from exposure to doping, a photoresist layer (not shown) is patterned to define lateral edges of the channel stop regions. The pattern excludes implants in N-tanks for switching transistors, and the LOCOS nitride excludes implants where the active regions will be. The channel stop implant is performed, for example, with a (P) type dopant such as boron at a dose of about 3×10^{13} ions/cm² and at an energy of about 30 KeV. The implant produces the channel stop regions represented by the pluses **37** in FIG. 3C. The channel stop regions **37** have been omitted from the subsequent sectional views shown in FIGS. 3C-3F for the purposes of clarity. The channel stop **37** implant acts to augment the conductivity type of the P-tank **11** in the implanted channel stop regions **37**. It also prevents the formation of parasitic transistor between the devices. Channel stop may also be implanted at this time in regions **21** shown in FIGS. 2 and 4. Channel stop areas are also created at the substrate **29** surface junctions of deep N-tank **32** and substrate **29** as well as at the substrate **29** surface junctions of P-tank **11** and deep N-tank **32**. An additional channel stop opening is shown for electrical connection to the substrate **29**. The

5

photoresist layer is subsequently ashed and cleaned from the surface of substrate **29**.

Referring again to FIG. **3B**, further processing under the channel stop step are described. Isolating oxide regions **21** (shown in FIGS. **2** and **4**) and **22** are grown by localized oxidation (LOCOS) to about 7600 Angstroms in thickness (the thicknesses of the sections shown in FIGS. **3B-3F** not being to scale). The growth occurs under an oxidizing atmosphere such as steam for about nine to ten hours at about 900° C. The oxidation occurs in those areas left open by the nitride/oxide mask **31** shown in FIG. **3B**. The thermal oxide grows beneath the edges of the mask **31**, creating a "bird's beak" **22a** instead of a sharp transition. The oxide portion of masking layer **31** is removed in a hydrofluoric acid dip for two minutes, and the nitride portion of layer **31** is removed in a hot phosphoric acid solution at about 185° C. for about 50 minutes.

After a cleanup step, a dummy oxide layer (not shown) is grown on the exposed silicon surface to remove damaged material. This dummy oxide layer is subsequently stripped with a hydrofluoric acid wet etch.

Turning now to FIG. **3C**, an arsenic implant is performed at a dosage of about 6×10^{15} ions/cm² at 135 KeV, using photoresist as an implant mask, to create the sources **15**, drains **16** and column lines **13**. Next, another thermal oxide **14** is grown on the face to a thickness of about 2500 to 3500 Å over the N+ buried column lines **13**, during which time a thermal oxide of perhaps 300 Å will grow over the channel areas (due to the differential oxidation occurring when heavily-doped and lightly-doped silicon areas are exposed to oxidation at the same time), to create the oxide layers **14** above the sources **15** and drains **16** and source-column lines **13**. This oxidation is in steam at about 800° to 900° C. At the transition areas **19** where the bird's beak **22a** has been formed, the edge of the originally-formed thermal oxide has masked the arsenic implant so the concentration is lower and so the oxide growth in that area is less than that of the oxide **14** or the oxide **22**.

Referring to FIG. **3D**, windows **19** are opened in the oxide in one of the transition area between oxides **14** and **22** for each cell **10**. This is done using photoresist as a mask, and etching through the oxide of transition area to the bare silicon, then regrowing a thinner oxide for the tunnel window **19**. During oxidation of tunnel window **19**, gate oxide **20** will grow to approximately 350 Å. A light phosphorus implant in the tunnel window **19** is used for enhanced field plate breakdown voltage.

Turning now to FIG. **3E**, a first polysilicon layer **17**, doped N+, is now applied to the face of the silicon slice, and an inter-level insulator coating **34** of oxide, or oxide-nitride-oxide, is applied to the polysilicon layer **17**.

The first-level polysilicon and the inter-level insulator are defined using photoresist to leave elongated strips in the Y-direction, parts of which will become the floating gates **17**. An oxidation, performed after the first-level polysilicon is defined, covers the edges of first-level polysilicon, and also creates the gate oxides **35** where the wordline **36** control conduction of the channel Ch. An additional patterned oxidation is performed for the low-voltage transistors.

Referring now to FIG. **3F**, a second polysilicon layer is deposited, doped N+, and patterned using photoresist to create the wordlines **36**/control gates **12**. At the same time as the wordlines **36**/control gates **12** are defined, the edges of the first-level polysilicon are etched, so that the elongated X-direction edges of the floating gates **17** are self-aligned with the edges of the control gates **12**. It should be noted that

6

the FIGS. are not drawn to scale and that, in particular, the thicknesses of the first and second polysilicon layers are generally much greater than the thicknesses of oxide layers **20** and **35**.

Peripheral logic CMOS devices, including wordline driver circuits **33**, are completed at this step. The wordline driver circuit may, for example, be constructed in the manner described in U.S. Pat. No. 4,823,318 issued Apr. 18, 1989 and assigned to Texas Instruments Incorporated. In general, such peripheral circuits will be located on the chip outside of deep N-tank **32**.

An oxide layer may be grown or formed after this process on the sides and top of the stack for improved data retention. A borophosphosilicate glass (BPSG) layer (not shown) may then be deposited over the face of the slice. Following the BPSG deposition, the substrate **29** is heated again at 850° to 900° C. in an annealing ambient to provide BPSG densification, repair implant damage and further junction profile drive. Off-array contacts may be made through the BPSG layer, as well as on-array contacts that are made from metal lines to respective diffused regions, such as terminals **27** and **28** and the substrate terminal indicated Vss. This is followed by a protective overcoat process.

The exemplary cell array is also described in U.S. Pat. No. 5,008,721 issued Apr. 16, 1991 and assigned to Texas Instruments Incorporated. The invention described herein is, of course, usable with many other types of floating-gate memory cell arrays.

While the invention has been described with reference to an illustrative embodiment, this description is not meant to be construed in a limiting sense. Various modifications of the illustrative embodiment, as well as other embodiments of the invention, will be apparent to persons skilled in the art upon reference to this description. It is, therefore, contemplated that the appended claims will cover any such modifications or embodiments that fall within the true scope of the invention.

We claim:

1. A nonvolatile, floating-gate memory, comprising:

- a semiconductor body having doping of a first conductivity-type;
- a first diffusion region in said semiconductor body, said first diffusion region having doping primarily of a second conductivity-type opposite said first conductivity-type;
- a second diffusion region in said first diffusion region and in said semiconductor body, said second diffusion region having doping primarily of said first conductivity-type;
- an array of floating-gate memory cells in and on said second diffusion region; and
- wordline driver circuitry in and on said semiconductor body outside of said first diffusion region.

2. The floating-gate memory of claim 1, wherein said semiconductor body is silicon of P conductivity-type, said first diffusion region is primarily of N conductivity-type and said second diffusion region is primarily of P conductivity type.

3. The floating-gate memory of claim 1, wherein said first diffusion region is connected to a non-negative potential with respect to the potential of said semiconductor body.

4. The floating-gate memory of claim 1, wherein said floating-gate memory has a primary power supply and wherein said first diffusion region is connected to said primary power supply.

5. The floating-gate memory of claim 1, wherein during programming operation, said second diffusion region is

7

connected to a source of potential that is negative with respect to the potential of said semiconductor body.

6. The floating-gate memory of claim 1, wherein during programming operation, said second diffusion region is connected to a charge pump voltage supply having an output voltage that is negative with respect to the voltage of said semiconductor body.

7. The floating-gate memory of claim 1, wherein Fowler-Nordheim tunnelling is used to program said floating gates of memory cells.

8. The floating-gate memory of claim 1, wherein said wordline driver circuitry operates at a maximum voltage less than the voltage required to program said floating-gate memory.

9. A nonvolatile, floating-gate memory, comprising:

a semiconductor body having doping of a first conductivity-type;

a first diffusion region in said semiconductor body, said first diffusion region having doping primarily of a second conductivity-type opposite said first conductivity-type;

a second diffusion region in said first diffusion region and in said semiconductor body, said second diffusion region having doping primarily of said first conductivity-type;

an array of floating-gate memory cells in and on said P-tank diffusion; and

wordline driver circuitry in and on said semiconductor body outside of said first diffusion region;

wherein said semiconductor body is silicon of P conductivity-type, said first diffusion region is primarily of N conductivity-type and said second diffusion region is primarily of P conductivity type;

wherein said first diffusion region is connected to a non-negative potential with respect to the potential of said semiconductor body;

wherein during programming operation, said second diffusion region is connected to a source of potential that is negative with respect to the potential of said semiconductor body;

8

wherein Fowler-Nordheim tunnelling is used to program said floating gates of memory cells; and

wherein said wordline driver circuitry is constructed to operate at a maximum voltage less than the voltage required to program said floating-gate memory.

10. A method for programming a nonvolatile floating-gate memory array, said memory array including a semiconductor body having doping of a first conductivity-type; including a first diffusion region in said semiconductor body, said first diffusion region having doping primarily of a second conductivity-type opposite said first conductivity-type; including a second diffusion region in said first diffusion region and in said semiconductor body, said second diffusion region having doping primarily of said first conductivity-type; said array having memory cells in and on said P-tank diffusion and having wordline driver circuitry in and on said semiconductor body outside of said first diffusion region; said method comprising:

applying a non-negative voltage to said first diffusion region;

applying a negative voltage to said second diffusion region;

causing said wordline driver circuitry to apply a positive voltage to selected wordlines of said memory array.

11. The method according to claim 10, wherein said wordline driver circuitry operates at a maximum voltage less than the voltage required to program said floating-gate memory.

12. The method according to claim 10, wherein said semiconductor body is silicon of P conductivity-type, said first diffusion region is primarily of N conductivity-type and said second diffusion region is primarily of P conductivity type.

* * * * *